




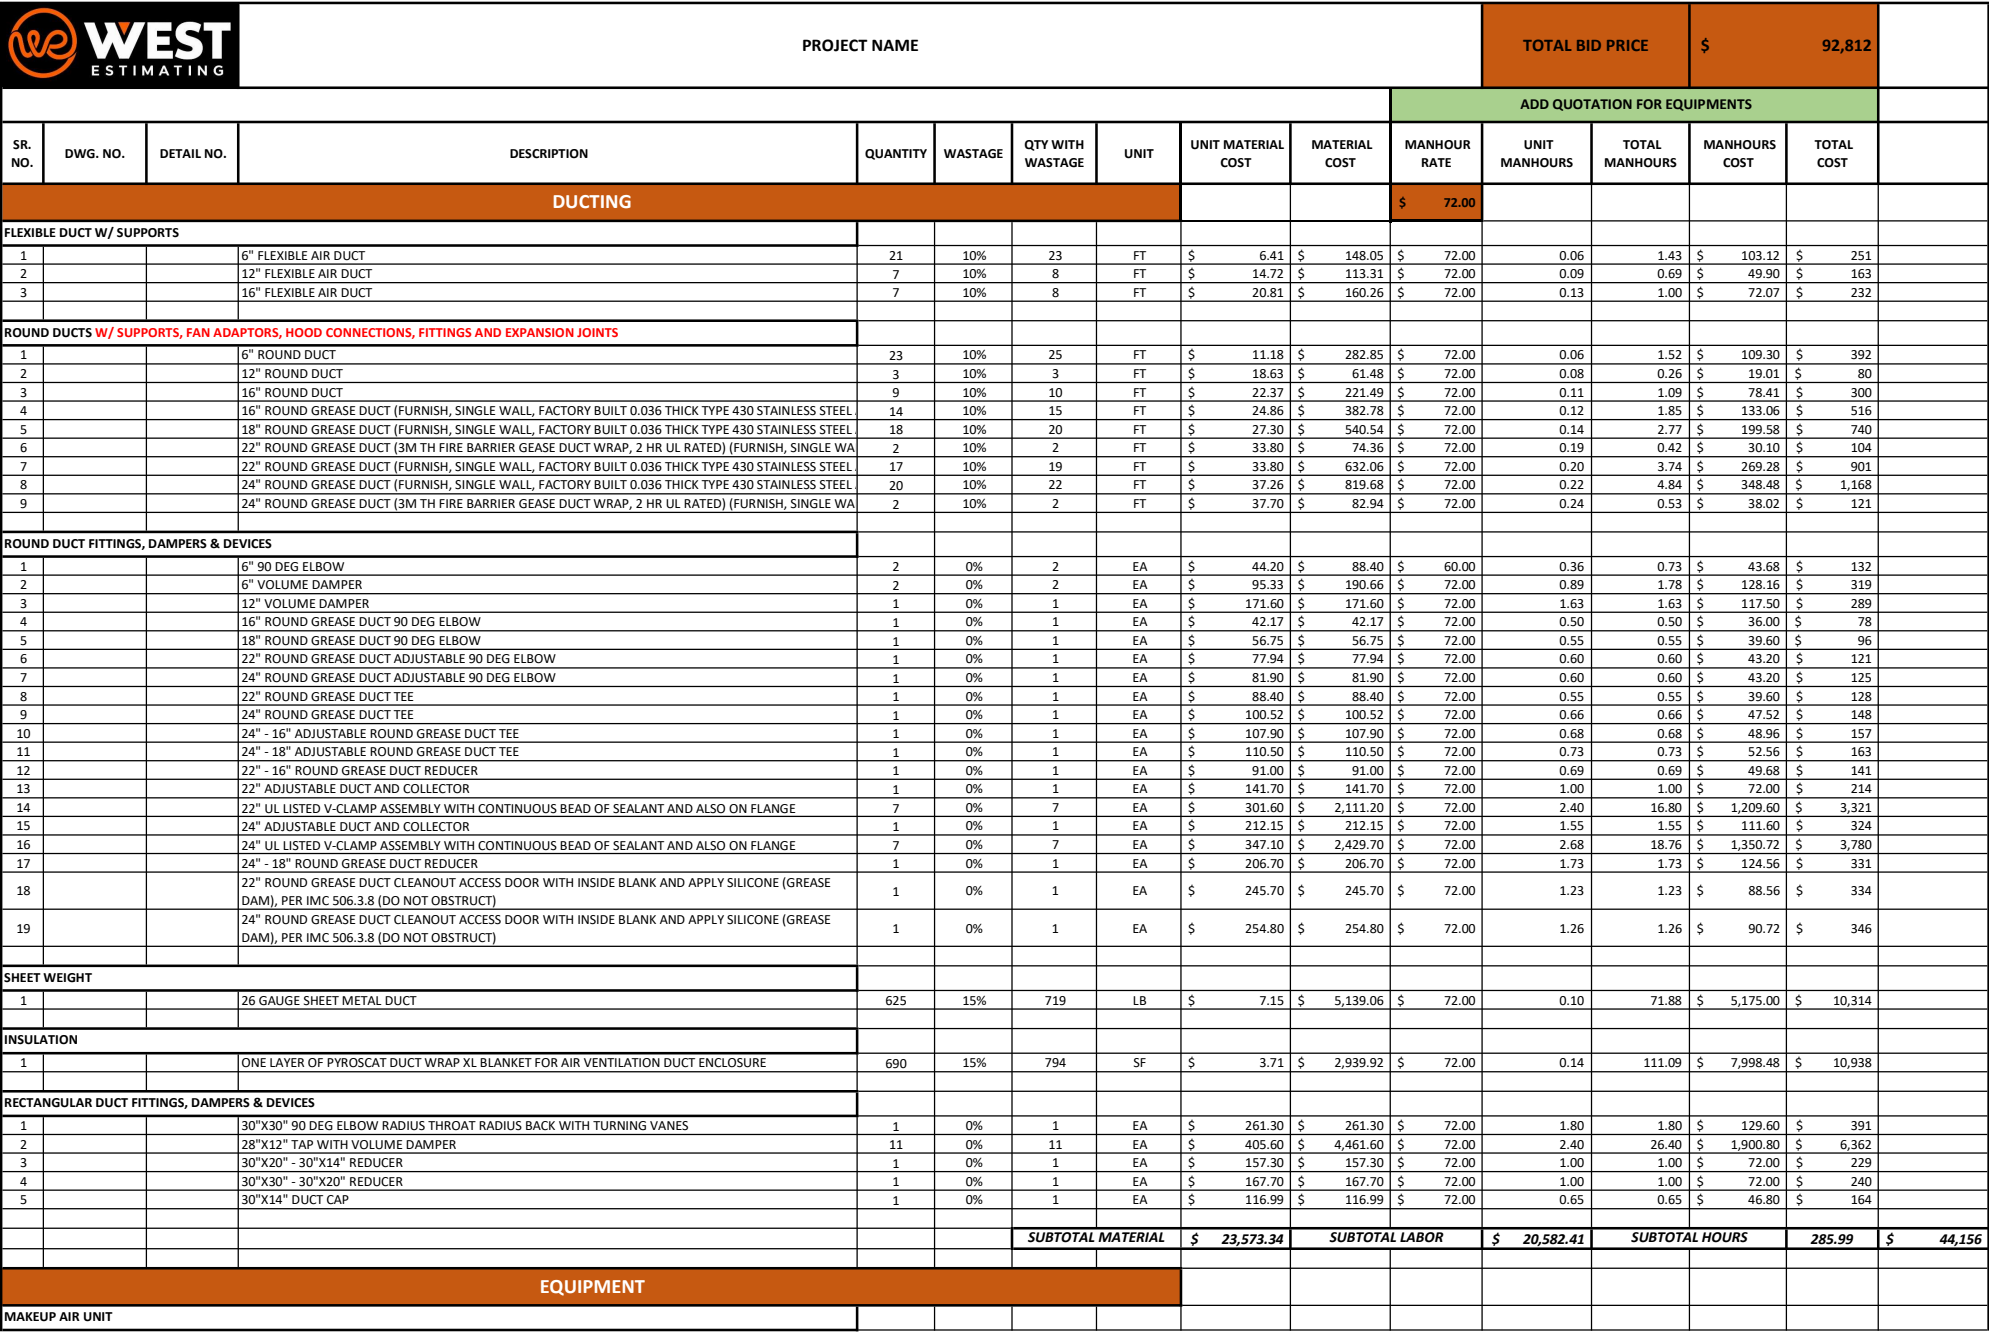

PROJECT NAME

TOTAL BID PRICE

\$ 92,812

ADD QUOTATION FOR EQUIPMENTS

SR. NO.	DWG. NO.	DETAIL NO.	DESCRIPTION	QUANTITY	WASTAGE	QTY WITH WASTAGE	UNIT	UNIT MATERIAL COST	MATERIAL COST	MANHOUR RATE	UNIT MANHOURS	TOTAL MANHOURS	MANHOURS COST	TOTAL COST	
1			MAU-1, 1592 LBS, 441.6 MBH, EA4-D.1000-30D, BLOWER: 30MF-4-MOD, A4-D.1000 HOUSING, 6000 MIN. CFM, 9248 CFM, 3 PH, 208 V, 1592 LBS, 15.9 SONES 0-35" INLET PRESSURE GAUGE MANIFOLD PRESSURE GAUGE -5 TO 15" WC SHIP LOOSE GAS STRAINER 1-1/4" MOTORIZED BACKDRAFT DAMPER FOR 34"X36" FOR SIZE 4 A4-D HOUSING - MEETS AMCA CLASS 1A RATING WITH EXTENDED SHAFTS SEPARATE 120V WIRING PACKAGE (REQUIRED AND USED ONLY FOR DVC OR REWIRE WITH VFD) - THREE PHASE ONLY 2 YEAR PARTS WARRANTY CURB: 93 LBS, 42.000"W X 42.000"L X 20.000"H INSULATED WITH 30" MIXED FLOW DIRECT DRIVE FAN #3, EA4-D.1000-30D - HEATER AND 24" BURNER INTAKE HOOD WITH E2 FILTERS HINGED DOUBLE WALL INSULATED DOOR ASSEMBLY (BURNER/BLOWER SECTION)	1	0%	1	EA		\$ -	\$ 72.00	36.59	36.59	\$ 2,634.48	\$ 2,634	
KITCHEN EXHAUST FANS															
1			KEF-1, 308 LBS, ECON-AIR #EADU240H, 5820 CFM, 2.000 ESP, 1069 RPM, ODP, PREMIUM MOTOR ENCLOSURE, 3 PH, 208 V, 308 LBS, 24.3 SONES, 20 GAUGE STEEL CONSTRUCTION GREASE BOX 2 YEAR PARTS WARRANTY CURB: 48 LBS, 31.500"W X 31.500"L X 20.000"H VENTED HINGED DIRECT DRIVE CONSTRUCTION RESTAURANT MODEL INTERNAL WIRING NEMA 3R SAFETY DISCONNECT SWITCH 2 HINGED KITS	1	0%	1	EA		\$ -	\$ 72.00	8.95	8.95	\$ 644.40	\$ 644	
2			KEF-2, 214 LBS, ECON-AIR #EADU200H, 4125 CFM, 1.375 ESP, 1267 RPM, ODP, PREMIUM MOTOR ENCLOSURE, 3 PH, 208 V, 214 LBS, 25.9 SONES, 20 GAUGE STEEL CONSTRUCTION GREASE BOX 2 YEAR PARTS WARRANTY CURB: 41 LBS, 26.500"W X 26.500"L X 20.000"H VENTED HINGED DIRECT DRIVE CONSTRUCTION RESTAURANT MODEL INTERNAL WIRING NEMA 3R SAFETY DISCONNECT SWITCH 2 HINGED KITS	1	0%	1	EA		\$ -	\$ 72.00	8.20	8.20	\$ 590.40	\$ 590	
HEATER															
1			DWH-1, 120 MBH, WATER HEATER	1	0%	1	EA		\$ -	\$ 72.00	6.60	6.60	\$ 475.20	\$ 475	
EXHAUST HOODS															
1			HOOD-1 (LEFT), ECON-AIR #6030 EX-2-PSP-F, 12 FT LONG, 600 DEG MAX. TEMP., TYPE "I", HEAVY DUTY APPLIANCE, 235 CFM/FT, 2820 EXH CFM, 430 SS WHERE EXPOSED, 1317 LBS HOOD HANGING WEIGHT (9) FILTERS: CAPTRATE SOLO, 20" HEIGHT, 16" LENGTH, 85% @ 7 MICRONS (6) LIGHTS: L55 SERIES E26, NO WIRE GUARD, 12"X60"X30" UTILITY CABINET: FS-1, FIRE SYSTEM, TANK FS TYPE, 4"X4"X4"X4" SIZE, MAX. FIRE PROTECTION 80 FIELD WRAPPER 18" HIGH FRONT, BACKSPLASH 80" HIGH X 492 LONG 430 SS VERTICAL, STRUCTURAL FRONT PANEL WITH HANGING ANGLE SUPPORT 3" INTERNAL UNINSULATED STANDOFF 1" INSULATED STANDOFF GREASE DRAIN WITH REMOVABLE CUP HIGH VELOCITY DIFFUSERS OR HVAC RETURNS SHOULD NOT BE PLACED WITHIN TEN FEET OF THE EXHAUST HOOD HEAT SENSOR	1	0%	1	EA		\$ -	\$ 72.00	26.32	26.32	\$ 1,895.04	\$ 1,895	

